

# PANELLIGHT SK Serien



220-240V  
50/60 Hz



IP20



UGR  
< 19

Pf  
> 0,95


Livstid:  
+ 50,000  
Timmar

Garanti:  
5 år



Produktnr.	Watt	Lumen	Kelvin	Ut	Färg
EV-60x60-3-HV-sk	40	4000	3000	80	Vit
EV-60x60-4-HV-sk	40	4000	4000	80	Vit
IDLC-45-1050-Dali	LED-drivdon med Dali				
LCM-40-Dali	LED-drivdon med Dali/push				
140616-01	Specialbeslag för dolt skensystem				

## Mått:

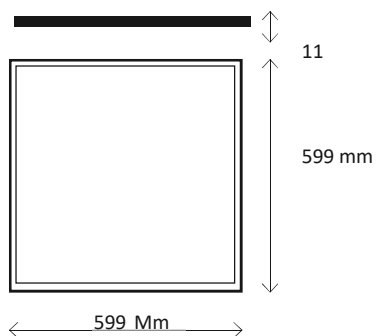

## Tekniska specifikationer:

**Montage:** Direkt i dolt skensystem

**Material:** Aluminium

**Optik:** Direkt

**Alternativ:** Prismatisk optik

**L80B10:** 50,000 timmar

## Elektriska specifikationer:

**Anslutning:** 220-240V AC 50/60 Hz

**Dim:** Dali/push

**Standard:** På/av

**Temperatur:** -20 ° c till 45 ° c